

PRODUCT SPECIFICATION

产品规格书

DESCRIPTION: LED Light box

产品名称: LED 灯箱

MODEL NO:

产品型号: AF45C

(LM-LED-ALS-24V-450375-2835)

Shanghai Edgelight Industry Co.,Ltd.


TEL: +86-21-64412288

FAX: +86-21-64412266

E-mail: info@edgelight.com




1. Picture of real products 产品图片



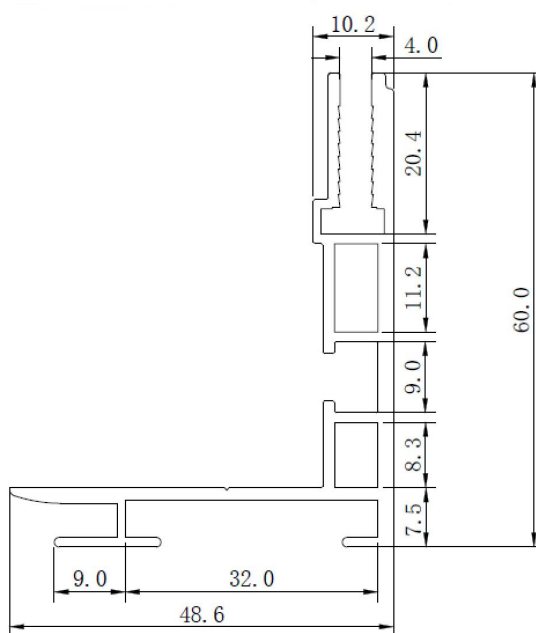


2. Dimensions 机械尺寸 (mm)



①

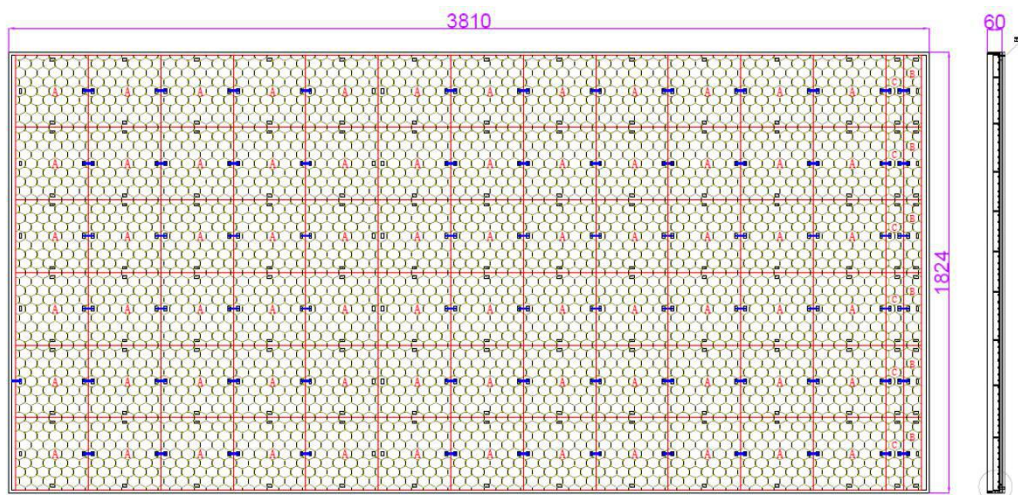



LED board A 72pcs
LED board B 6pcs
LED board C 6pcs

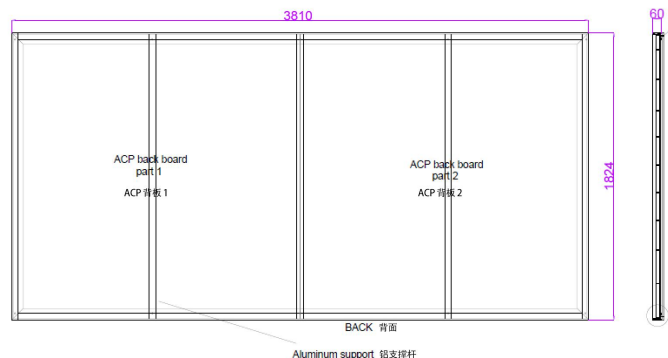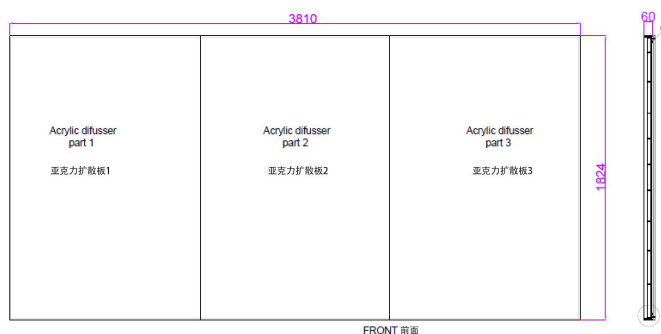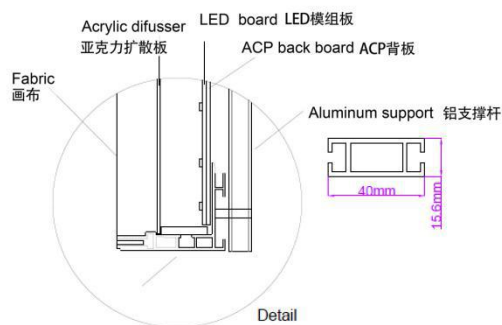


②

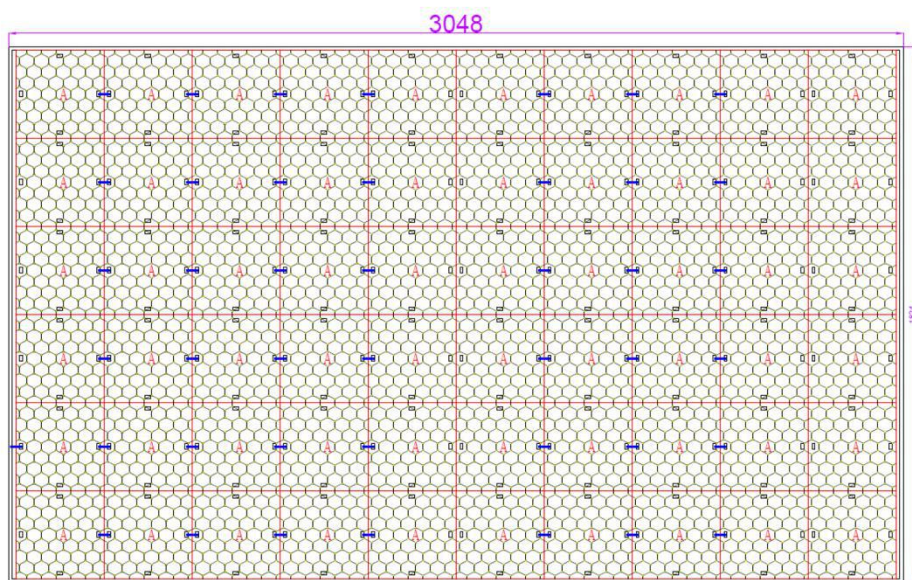

LED board A 60pcs

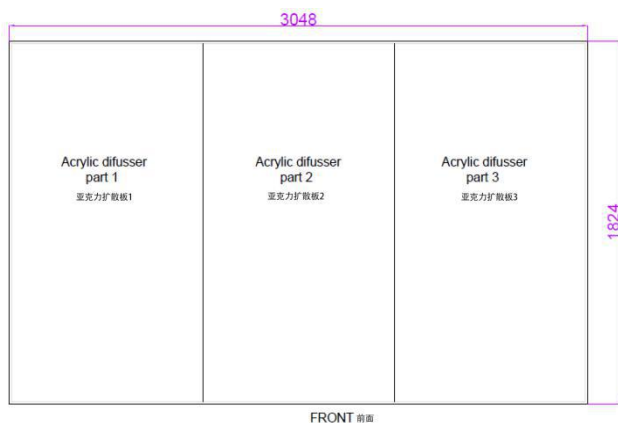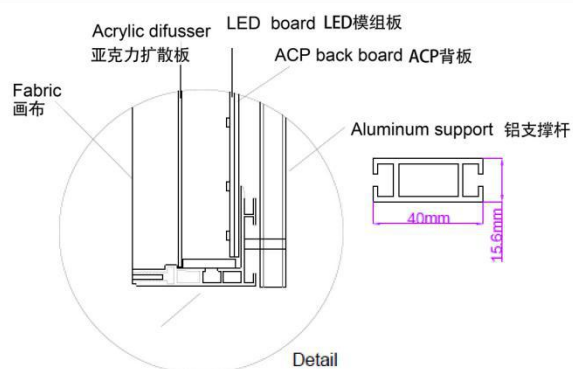

FRONT 前面

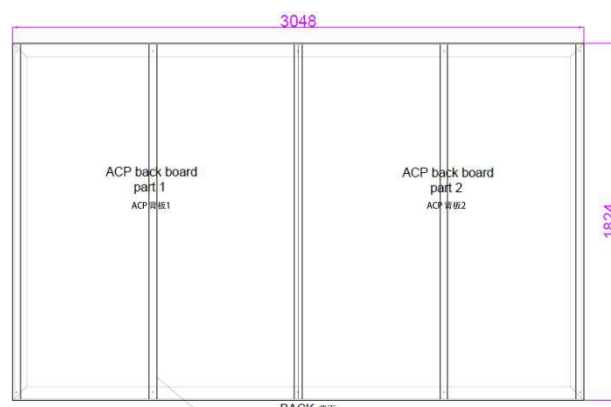

BACK 背面

Aluminum support 铝支撑杆

Notes 说明

1. Size can be customized

尺寸可定制

2. All dimension units are millimeters.

所有尺寸单位均为毫米

3. All dimension tolerance is $\pm 0.5\text{mm}$ otherwise additional statement.

除非另有说明，否则所有尺寸的公差是 $\pm 0.5\text{mm}$

3. Features 产品特性

An advertising light box with frameless display of advertising content, convenient for painting, using UV soft film or woven fabric as a picture, the picture can be displayed in the aluminum material, highlight, simple, generous, highlighting the brand strength.

一款以无框展示广告内容的广告灯箱，换画方便，用 UV 软膜或纺织布类作为画面，将画面卡入铝材中即可展示，高亮、简单、大方，彰显品牌实力。

※ Fabric light box

画布式灯箱

※ Packaging: bubble bag, cartons, plus plywood frame for seafreight

包装方式：气泡袋、纸箱，海运另加胶合板木框

※ Structure: led module , aluminum frame

结构：采用 led 模组，铝框外框

※ Frame color: oxidated alloy aluminum, other colors can be customized

外框颜色：氧化铝合金，需其他颜色可通过电泳、喷涂、烤漆等工艺定做

※ Easy installation, safe and simple to use

安装简单、使用安全、简便

※ Visible surface: single

可视面：单面

※ Voltage: DC voltage 24V

电压：直流电压 24V



4.Applications 应用范围

Shopping malls, hospitals, subways, chain stores, airports, banks, specialty stores, etc.

商场、医院、地铁、连锁店、机场、银行、专卖店等

5.Technical Request 技术参数

MAIN SPECIFICATIONS(T=20)			
NUMBER 序号	ITEM 项目	DESCRIPTION 描述	
01	Size (尺寸)	3048*1824*60mm	3810*1824*60mm
02	Voltage (电压)	24V	
03	Power (功率)	1152W	1440W
04	LED Current (电流)	48A	60A
05	Color temperature (色温)	6000-6500K(white 白)	
06	Life time (使用寿命)	>50,000 Hour	
07	Operating temperature (工作环境温度)	-20 to +50℃	
08	Storage temperature(储存温度)	-20 to +70℃	
09	Humidity operating (工作湿度)	30%-70%	
10	Humidity storage (储存湿度)	30%-70%	



6.LED Description 光源描述

型号	颜色	线路板尺寸 (mm)	光通量 (LM)	总功率 (W)	灯珠数(pcs)
Item	Color	PCB size	Luminous flux	Power	LED Q'ty
LM-LED-ALS-24V-300300-2835-96-A	White 白光	300*300	2000	19.2	96
LM-LED-ALS-24V-300300-2835-24-B	White 白光	300*75	528	4.8	24
LM-LED-ALS-24V-300300-2835-24-C	White 白光	300*75	528	4.8	24

7. Safety Notice for Using 安全使用注意事项

※Before starting use of the light, please check if the light was damaged during transportation.If any damage shown, please Do not install or use it.

在使用之前，需确认产品在运输中有没有被损坏，若有损坏就不能安装使用

※Any maintenance should be performed by trained professionals only.

不要尝试自己维修，只能由专业工程师去维修

※Keep packaging material away from the reach of children and pets. Risk of suffocation!

包装材料要远离小孩，防止小孩玩弄导致窒息

※Caution. The packaging contains small parts that may be swallowed by children.

防止产品小的配件被小孩吞食

※Never leave children unattended in the vicinity of the lights and do not allow them to play with electrical devices.

让小孩远离产品，更不要让小孩接触带电设备

※Try to avoid looking directly in the LED beam-especially for extended periods of time. Do not shine the LED light in another person's eyes.

避免长时间直视LED的发光面，不要用反射的LED的光去照射别人的眼睛



※Never cover the lights by other objects while using it.

不要在工作中的产品上覆盖任何物品

※Never allow the light to come into contact with open flames or external heat sources.

产品要远离明火或高温物体

※The products need to re-repair inspection or special treatment of retirement after service time.

产品过了使用期限，需要重新维修检查，或报废处理

